


2.0MP HYBRID CAMERA



HD Over Coax



DIMENSION

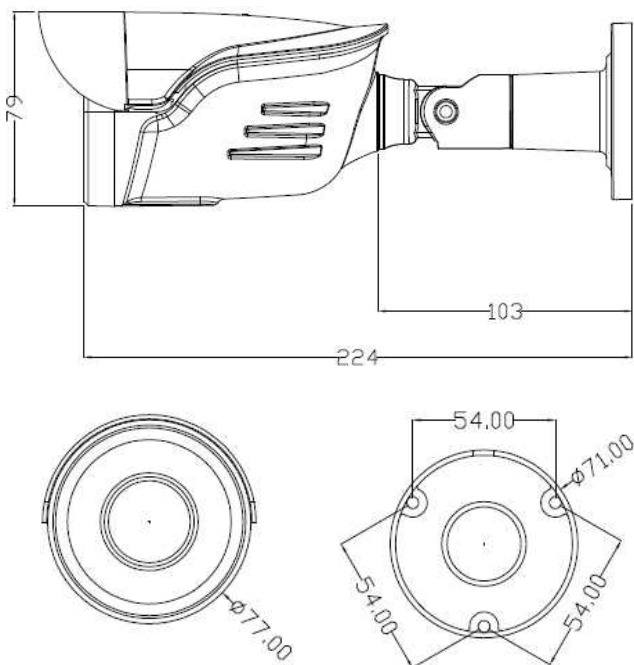

KEY FEATURES

- Adopt 2.0 megapixels CMOS sensor
- Support 4 in 1: AHD, TVI, CVI, CVBS signal output
- Support control OSD menu via Coax
- Support over 500 meters coaxial cable transmission
- Support day and night mode switch
- 42pcs IR LED, IR Range: 30M, with IR CUT
- HD 2.8-12MM Vari-focal lens, external adjustable
- Junction Box is optional

SPECIFICATION

Model No.	SF-AHC324Y-ICR-S6
6Sensor	1/2.9" 2.0MP CMOS CMOS SONY Exmor IMX323LQN
DSP	Nextchip NVP2441
Signal System	PAL/NTSC
Effective Pixel	1920H*1080V, 2.0MP
Min illumination	Low 0.01LUX / F1.2(AGC ON) Color, 0Lux IR on
Signal Type	4 in 1: AHD, TVI, CVI, CVBS
IRIS Lens	Manual/DC: indoor, outdoor (1/25 ~ 1/50000)
Lens	HD 2.8~12mm Vari-focal lens
IR LED	42pcs IR LEDs, 30M IR Range
Transmission Distance	Over 500 meters with 75-3Ω coaxial cable
SNR	≥50DB (AGC off)
OSD	Support UTC control OSD menu via coaxial cable (DVR)
OSD Languages	CHN/ENG/GER/FRE/ITA/SPA/POL/RUS/POR/NED/TUR/JAP
BLACKLIGHT	OFF/BLC/HSBLC
White Balance	ATW, AWC-SET, Indoor, Outdoor, Manual, AWB
Shutter	Auto, 1/25s~1/50000s(PAL), 1/30s~1/60000s(NTSC), FLK, X2 ~ X30
AGC	0~15 adjustable
Brightness	0~100 adjustable
Sharpness	Auto/0~10 adjustable/OFF
D-WDR	OFF/ON 0~8 adjustable/AUTO
Mirror	OFF/Mirror/V-Flip/Rotate
Day & Night	EXT/(B/W)/COLOR/AUTO
3D/2D-DNR	OFF/LOW/MIDDLE/HIGH
Waterproof	IP66
Work Environment	Temperature -20°C ~ +60°C, Humidity less 90%(non condensation)
Power	DC12V±10%

TRANSMISSION



1920H X 1080V



HD video output



HD DVR